


LEFT SIDE COWL CB1300S/SA

Removal:


1. Remove the lower cowl (page 87).
2. Remove the clips A (1).
3. Remove the screw (2).
4. Remove the meter cover (3).
5. Use the 6 mm hex wrench (4) and extension bar (5) to remove the bolts (6).
6. Remove the clip A (7).
7. Remove the left side cowl (8) and disconnect the front turn signal connector (9).

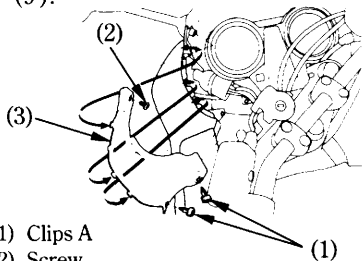

- (1) Clips A
- (2) Screw
- (3) Meter cover

Installation:

- Installation can be done in the reverse order of removal.

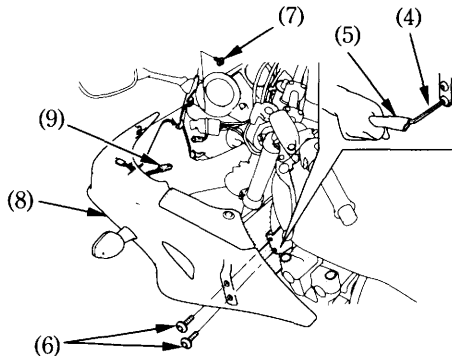

- (4) 6mm hex wrench
- (5) Extension bar
- (6) Bolts
- (7) Clip A
- (8) Left side cowl
- (9) Front turn signal connector