

LEFT SIDE COWL CB1300S/SA


The left side cowl must be removed to replace the headlight bulb.

Removal:

1. Remove the lower cowl (page 87).
2. Remove the clips (1).
3. Remove the screw A (2).
4. Remove the meter cover (3).
5. Use the 6 mm hex wrench (4) and extension bar (5) to remove the bolts (6).
6. Remove the screw B (7).
7. Remove the left side cowl (8) and disconnect the front turn signal connector (9).

Installation:

- Installation can be done in the reverse order of removal.

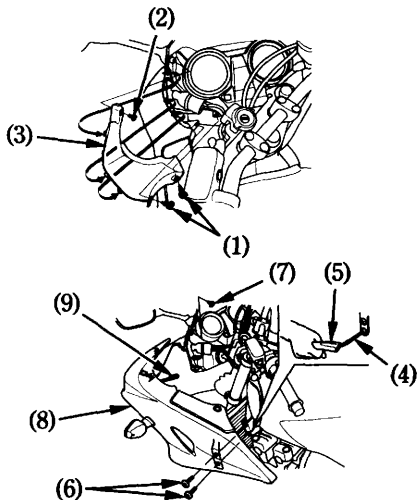

- | | |
|--------------------|---------------------------------|
| (1) Clips | (6) Bolts |
| (2) Screw A | (7) Screw B |
| (3) Meter cover | (8) Left side cowl |
| (4) 6mm hex wrench | (9) Front turn signal connector |
| (5) Extension bar | |