


PARKING //

When parking the motorcycle, turn the main switch to the "OFF" position and remove the key. The steering should also be locked. Turn the fuel valve to the "STOP" position. When parking at night near traffic, the main switch can be turned to the "PARKING" position and the key removed (page 15). This will turn on the taillight and make the motorcycle more visible to traffic.

TOOL KIT //

The tool kit ① is mounted in the compartment located at the center of the motorcycle. Minor adjustment and parts replacement can be performed with the tools contained in the kit. Adjustments or repairs which cannot be performed with these tools should be referred to your Honda dealer.

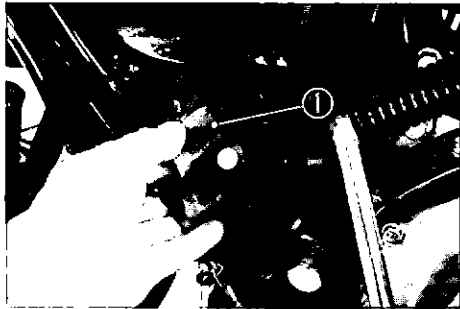

① Tool kit