




⚠ WARNING
 DO NOT REMOVE RADIATOR CAP WHILE THE ENGINE IS HOT. ALLOW THE ENGINE TO COOL BEFORE DRAINING. SEVERE SCALDING MAY RESULT.

⚠ CAUTION
 CHECK THE COOLING SYSTEM FREQUENTLY BY OBSERVING THE COOLANT LEVEL IN THE RESERVE TANK. ADD NECESSARY COOLANT TO THE RESERVE TANK FILLER OPENING.
 ONLY USE A 50/50 SOLUTION OF ANTIFREEZE OR SUMMER COOLANT AND DISTILLED WATER TO AVOID POSSIBLE OVERHEATING THAT CAN LEAD TO ENGINE DAMAGE.

⚠ DRIVE CHAIN CAUTION

- THIS CHAIN CONTAINS RUBBER SEALS. DO NOT STEAM CLEAN OR USE SOLVENTS. REDUCED CHAIN LIFE MAY OCCUR IF MAINTENANCE INSTRUCTIONS ARE NOT STRICTLY FOLLOWED.
- CHAIN SLACK SHOULD BE 15—25 mm (5/8—1 IN) WHEN ADJUSTED AND NEVER BE ALLOWED TO EXCEED 50 mm (2 IN).
- LUBRICATE WHENEVER CHAIN APPEARS DRY. INSPECT AND LUBRICATE EVERY 1,000 km (600 MILES). USE SAE 80 OR 90 GEAR OIL ONLY.
- REPLACE CHAIN WHEN RED ZONE ON LABEL REACHES INDEX MARK WITH CHAIN SLACK SET TO 15—25 mm (5/8—1 IN).
- REPLACEMENT CHAIN: DID 525V8 OR RK 525SM4
- READ OWNER'S MANUAL CAREFULLY.

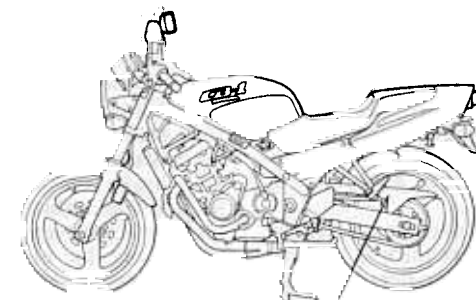

TIRE INFORMATION			
COLD TIRE PRESSURES:			
(UP TO MAXIMUM WEIGHT CAPACITY)			
FRONT	225 kpa	2.25 kg/cm ²	33 psi.
REAR	250 kpa	2.50 kg/cm ²	36 psi.
(UP TO 90kg (200 lbs.) LOAD)			
FRONT	225 kpa	2.25 kg/cm ²	33 psi.
REAR	225 kpa	2.25 kg/cm ²	33 psi.
TIRE BRAND	BRIDGESTONE	DUNLOP	
TIRE SIZE	FRONT 110/70-17 54H 0547	110/70-17 54H K806F	
	REAR 140/70-17 60H 0549	140/70-17 60H K829	
THIS MOTORCYCLE IS EQUIPPED WITH TUBELESS TIRES.			
MAXIMUM WEIGHT CAPACITY:			
157 kg (347 lbs.)			
MIN. RECOMMEND TIRE CENTER TREAD DEPTH			
FRONT: 3mm (0.051in)		REAR: 2.0mm (0.031in)	
Read Owner's Manual			