


CRANKCASE BREATHER

1. Remove the drain plug (1) from the tube and drain deposits.
2. Reinstall the drain plug.

NOTE:

- * Service more frequently when ridden in rain or at full throttle. Service if the deposit level can be seen in the transparent section of the drain tube.

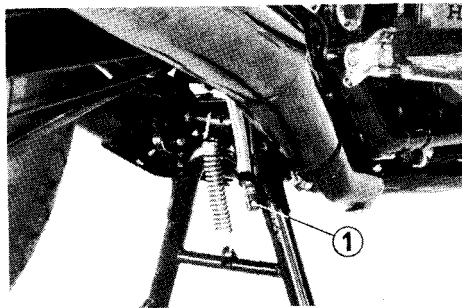

(1) Drain plug