


CRANKCASE BREATHER

(Refer to the maintenance precautions on page 59).

1. Remove the drain plug (1) from the tube and drain deposits into a suitable container.
2. Reinstall the drain plug.

NOTE:

- * Service more frequently when riding in rain, at full throttle, or after the motorcycle is washed or overturned. Service if the deposit level can be seen in the transparent section of the drain tube.

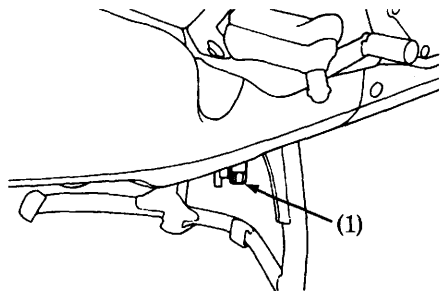

(1) Drain plug