



Italian only

1. Remove the socket (1) by pulling it upward.
2. Slightly press down on the bulb (2) and turn it counterclockwise.
3. Install a new bulb (2).
4. Align the tab (3) of the socket with the hole in the headlight case (4) and press the socket into place on the headlight case securely.

NOTE:

- * Do not use bulbs other than that specified.
- * After installing a new bulb, check that the light operates properly.

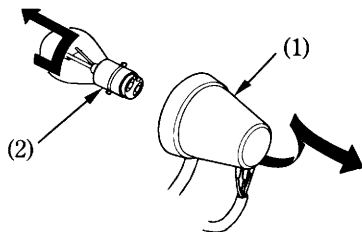

(1) Socket
(2) Bulb

(3) Tab
(4) Headlight case