


4. Turn the socket (4) counterclockwise, and remove it.
5. Slightly press the bulb (5) and turn it counterclockwise.
6. Install a new bulb in the reverse order of removal.
  - Use only the amber bulb.

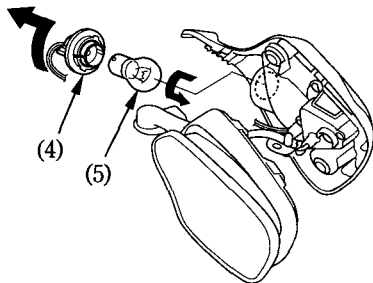

- (4) Socket  
(5) Bulb