


6. Connect the radiator hose (10) to the cylinder head and tighten the radiator hose clamp (11) securely.

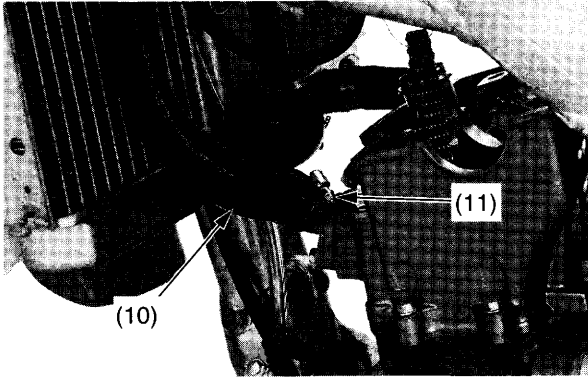

(10) radiator hose  
(11) radiator hose clamp

7. Install the shims, valve lifters and camshaft (page 61).
8. Install the spark plug (page 55).

9. Install the crankshaft hole cap (page 63).
10. Install the cylinder head cover (page 63).
11. Install the exhaust pipe (page 90).
12. Install the carburetor (page 126).
13. Install the subframe (page 33).
14. Install the fuel tank and the seat (pages 29, 31).

15. Pour a fresh recommended coolant mixture (page 41).

Check for the following:

- compression leaks
- abnormal engine noise
- secondary air leaks
- coolant leaks