



26. With the front brake applied, pump the fork up and down several times to seat the axle and check front brake operation.

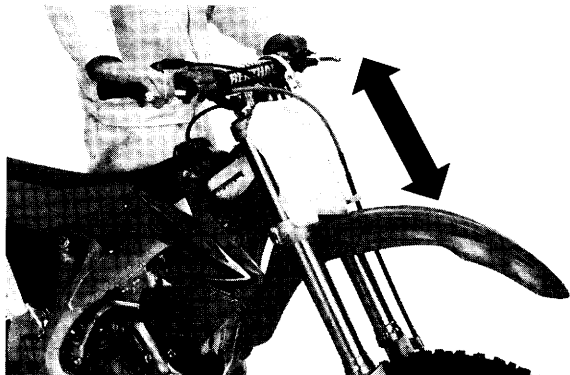

27. While keeping the forks parallel, alternately tighten the right axle pinch bolts (29) to the specified torque:
20 N·m (2.0 kgf·m, 15 lbf·ft)

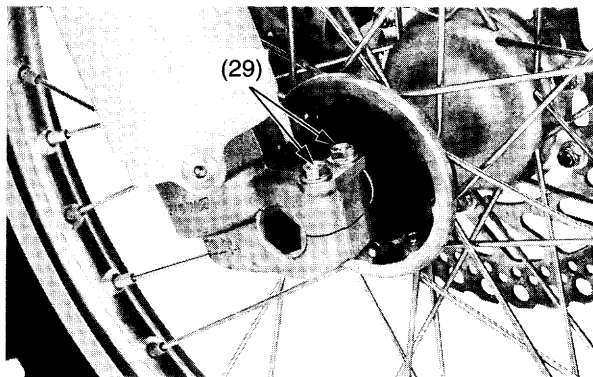


(29) right axle pinch bolts

NOTICE

To avoid damage when torquing the axle pinch bolts, be sure the axle is seated firmly onto the left fork leg clamp inner surface.


28. Install the disc cover (30) and tighten the disc cover bolts (31) to the specified torque:
13 N·m (1.3 kgf·m, 10 lbf·ft)

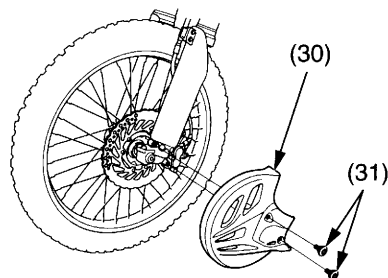

(30) disc cover

(31) disc cover bolts

29. Turn the rebound damping (32) and compression damping (33) adjuster screws back to their original settings.

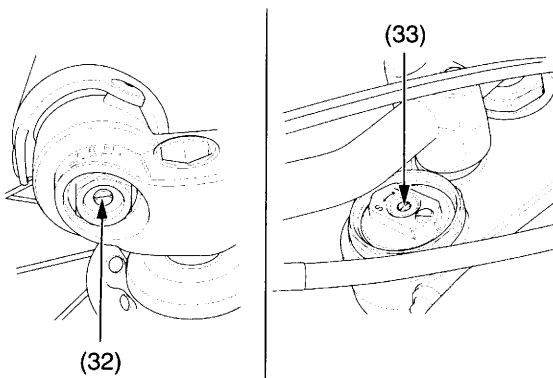

(32) rebound damping adjuster screw

(33) compression damping adjuster screw

30. Install the number plate (page 91).