


MAINTENANCE

Rear Turn Signal Bulb

1. Open the saddle bag.
2. Remove the nuts and rear turn signallight assembly.

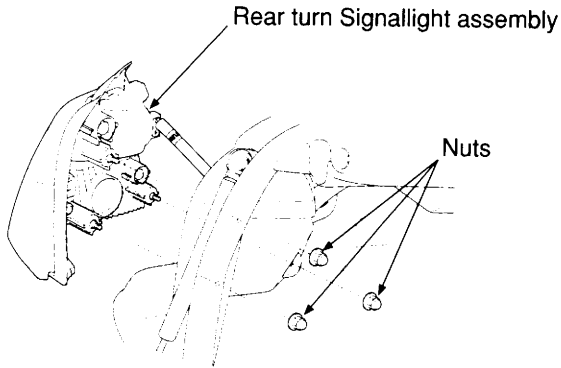

3. Turn the socket (1) approximately 45° counterclockwise, then pull it out toward you.
4. Pull out the bulb (2) without turning.
5. Install a new bulb in the reverse order of removal.

