


Headlight Beam Adjustment

The headlight must be kept properly adjusted for safe nighttime riding.

Vertical adjustment is made by pivoting the headlight case on its mounting bolts

①.

Horizontal adjustment is made by turning the adjusting screw ② located on the headlight rim.

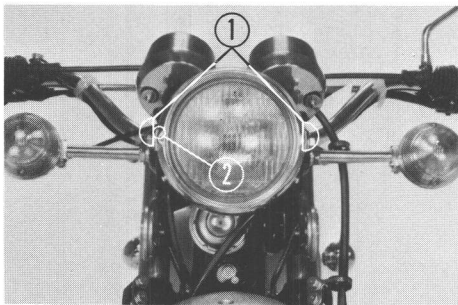


① Headlight mounting bolts

② Adjusting screw

Stoplight Switch Adjustment

The stoplight switch ① must be adjusted so that the stoplight will come on when the rear brake is applied. Rear brake free play (page 53) should be adjusted before performing the stoplight switch adjustment. The procedure for adjusting the stoplight switch is as follows:

1. Turn the main switch to the "ON" position.

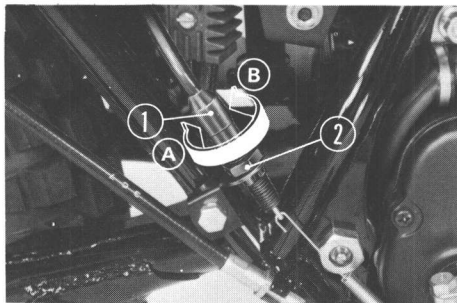

① Stoplight switch

② Adjusting nut