


## CLIP

### Removal:

1. Remove the pin by a Phillips screwdriver.
2. Pull out the clip A from the hole.

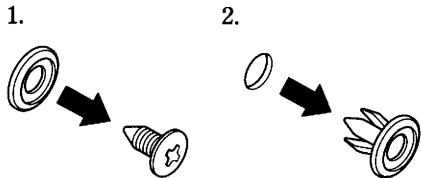

### Installation:

1. Insert the clip A into the hole.
2. Push the pin in.

