


4. Check the chain slider (2) for wear.
When the thickness (3) of the chain slider reaches the limit, the chain slider (2) must be replaced.

Chain slider thickness limit:
3 mm (0.12 in)

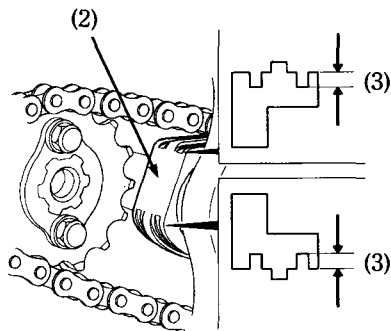

(2) Chain guide slider (3) Thickness


5. Inspect the sprocket teeth for possible wear or damage. Replace if necessary.

Damaged Sprocket
Teeth

Worn Sprocket
Teeth

REPLACE

REPLACE



Normal Sprocket Teeth

GOOD

NOTE:

* If the drive chain or sprockets are excessively worn or damaged, they should be replaced. Never use a new chain with worn sprockets; rapid chain wear will result.