


turning the counterclockwise will loosen the chain. Upon completion of adjustment, the index mark ③ on the both the right and left chain adjusters ⑤ should be at the same reference marks ④ on the rear forks. (page 28)

4. Finally, tighten the axle nut securely to prevent the nut from loosening.
5. When the drive chain is dirty excessively, it is recommended that the drive

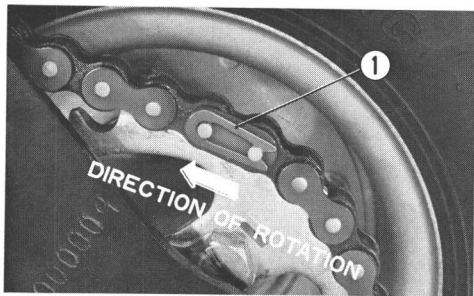

① Master link retaining clip

chain be cleaned as following steps.

- 1) Carefully remove the master link retaining clip with pliers. Do not bend or twist the clip. Remove the master link. Remove the drive chain from the bike.
- 2) Clean the drive chain in solvent and allow to dry. Inspect the drive chain for possible wear or damage. Replace any chain that has damaged rollers, loose fitting links, or otherwise appears unserviceable.
- 3) Lubricate the drive chain.
- 4) Install the master link retaining clip ① so that the closed end of the clip will face the direction of forward wheel rotation.
- 5) Adjust the drive chain to the proper tension, following the instructions on page 28~29.