


- (4) Pull the choke knob up in the arrow direction.

The choke should not be used when the engine is hot.

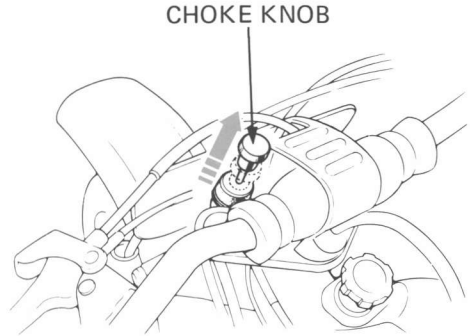

- (5) With closed throttle, operate the kickstarter several times. Starting from the top of the stroke, kick through to the bottom with a rapid, continuous motion.
- (6) After the engine starts, run it for 1–2 minutes until it warms up enough to idle. The choke knob should be returned as soon as possible to prevent spark plug fouling.

NOTE:

The engine cannot be started unless the rear brake lever is pulled in and locked by the lock lever.