


Brake fluid must be added to the reservoir whenever the fluid level begins to reach the lower level mark (1).

1. Remove the screws (2), reservoir cap (3), diaphragm plate (4) and diaphragm (6).
2. Fill the reservoir with DOT 3 or DOT 4 BRAKE FLUID from a sealed container up to the upper level mark (6).
3. Reinstall the removed parts in the reverse order of removal.

Other Checks:

Make sure there are no fluid leaks. Check for deterioration or cracks in the hose and fittings.

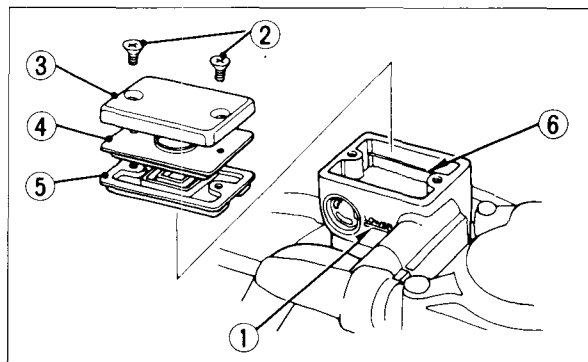

- | | |
|----------------------|----------------------|
| (1) Lower level mark | (4) Diaphragm plate |
| (2) Screws | (5) Diaphragm |
| (3) Reservoir cap | (6) Upper level mark |