


To install the seat, insert the seat tab under the frame cross member and push down on the rear of the seat. Turn the key counterclockwise to lock the seat, then remove the key.

Lift the seat to make sure it is locked securely in position.

To install the seats, reverse the removal procedure.

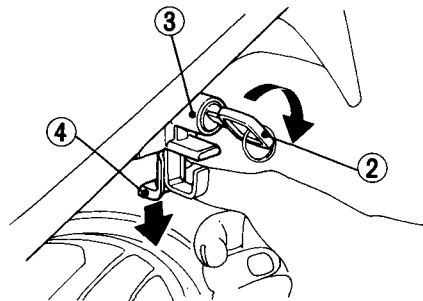


(2) Ignition key  
(3) Helmet holder

(4) Seat lock lever

## DOCUMENT BAG

The document bag (1) is under the seat.

This owner's manual and other documents should be stored in the document bag. When washing your motorcycle, be careful not to flood this area with water.

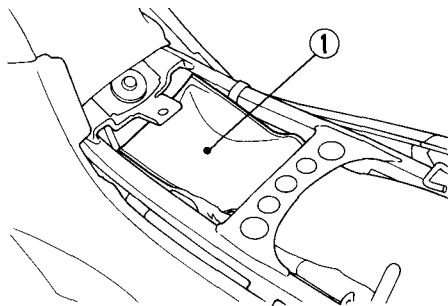

(1) Document bag