

## SPARK PLUGS

Refer to the Safety Precautions on page 72 .

Recommended plugs:

Standard:

DPR7EA-9 (NGK) or  
X22EPR-U9 (DENSO)

For extended high speed riding:


DPR8EA-9 (NGK) or  
X24EPR-U9 (DENSO)

### NOTICE

Never use a spark plug with an improper heat range. Severe engine damage could result.

To inspect or replace the spark plugs, use an appropriate spark plug wrench or see your Honda dealer.

1. Disconnect the spark plug caps (1) from the spark plugs.
2. Clean any dirt from around the spark plug bases.  
Remove the spark plugs using a spark plug wrench.

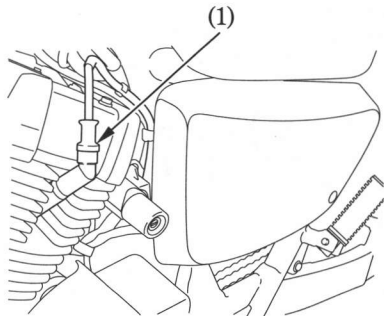

(1) Spark plug cap