


FRONT SUSPENSION

(Refer to the maintenance precautions on page 45).

Check front fork action by locking the front brake and pumping the forks up and down several times. The suspension should function smoothly, with no oil leakage from the fork legs. Damaged, binding, or leaking front forks should be repaired before the motorcycle is operated. Check security of all front fork and handlebar mounting bolts (1).

▲ WARNING

- * **Operating the motorcycle with loose, worn, or damaged steering or front suspension components may adversely affect vehicle handling and stability.**
- * **If any suspension components appear worn or damaged, consult your authorized Honda dealer for further inspection. The suspension components are directly related to safety and your authorized Honda dealer is qualified to determine whether or not replacement parts or repairs are needed.**

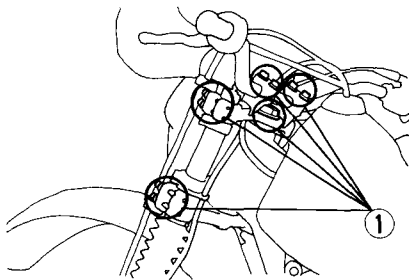

(1) Mounting bolts