


4. Check the chain slipper (2), chain guide slider (3) and chain roller (4) for wear. When the depth (5) of the chain slipper reaches the limit, the chain slipper must be replaced. Chain slipper depth limit:

8 mm (0.3 in)

Replace the chain guide slider if the chain is visible through the wear inspection window (6).

Replace the chain roller if it is smaller than:

25 mm (1.0 in)

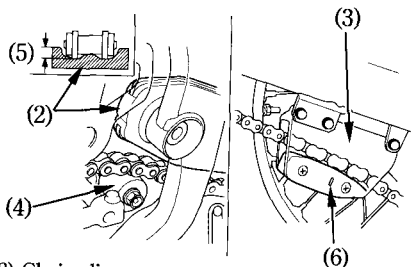


- (2) Chain slipper
 (3) Chain guide slider
 (4) Chain roller
 (5) Depth
 (6) Inspection window

5. Measure a section of the drive chain to determine whether the chain is worn beyond its service limit. Remove the drive chain and measure the distance between a span of pins from pin center to pin center. If the distance exceeds the service limit, the chain is worn out and should be replaced.

New chain: 1,667 mm (65.6 in)

Service limit: 1,675 mm (65.9 in)

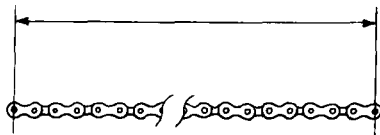

Span of pins measured: 106