


The drive chain is equipped with grease-retaining O-rings inside the chain to improve its service life. However, special precautions must be taken when adjusting, lubricating, washing and replacing the chain.

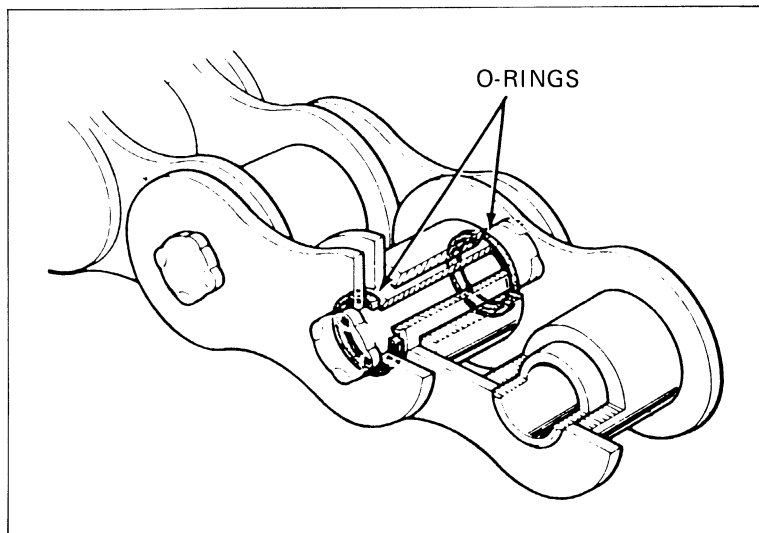

Clean the drive chain with kerosene and wipe dry.


CAUTION

Do not use a steam cleaner, high pressure washers or solvents as these will damage the O-rings.

Lubricate the drive chain with SAE 80 or 90 gear oil.

CAUTION

Use aerosol chain lubricants unless they are specifically for O-ring equipped chains. Other aerosol lubricants may contain solvents which could damage the O-rings.

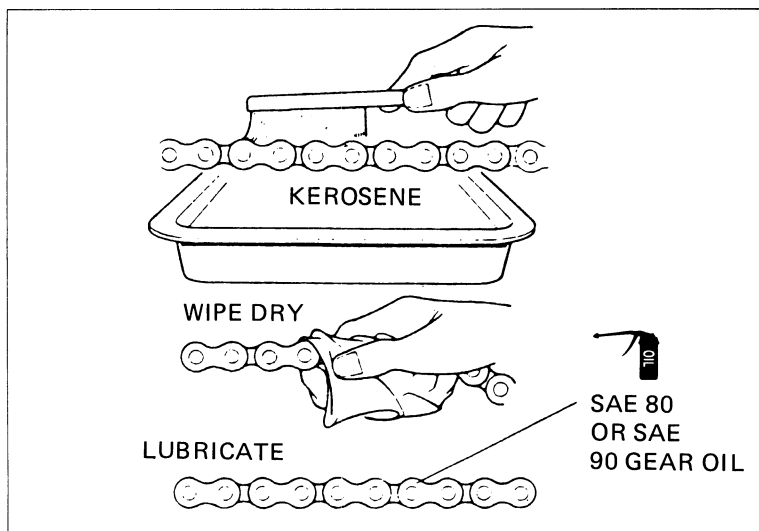

Inspect the drive chain and O-rings for possible wear or damage. Replace the chain, if it is worn excessively or damaged.

Measure the drive chain length with the chain held so that all links are straight.

45 PINS LENGTH:

STANDARD: 698.5 mm (27.50 in)

SERVICE LIMIT: 705.5 mm (27.78 in)

