



Tighten the cam sprocket bolt.
Turn the crankshaft clockwise one turn and tighten the remaining cam sprocket bolt to the same torque.
TORQUE: 17–23 N·m (1.7–2.3 kg-m, 12–17 ft-lb)

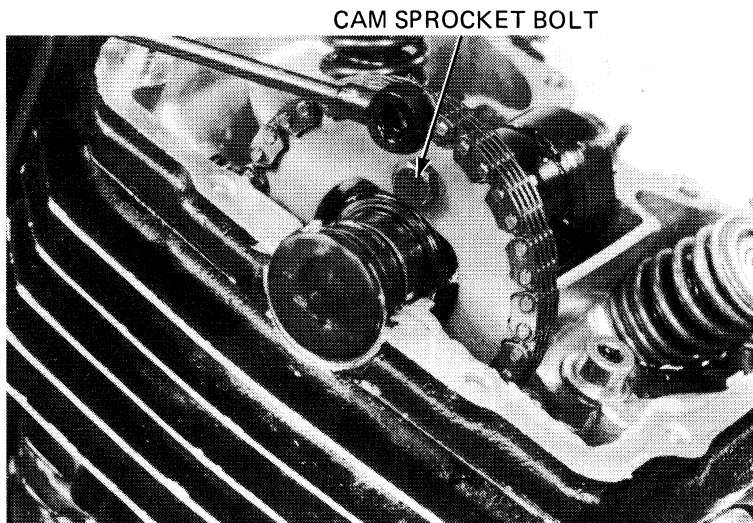

Realign the "T" mark with the index mark and recheck the cam sprocket timing marks.

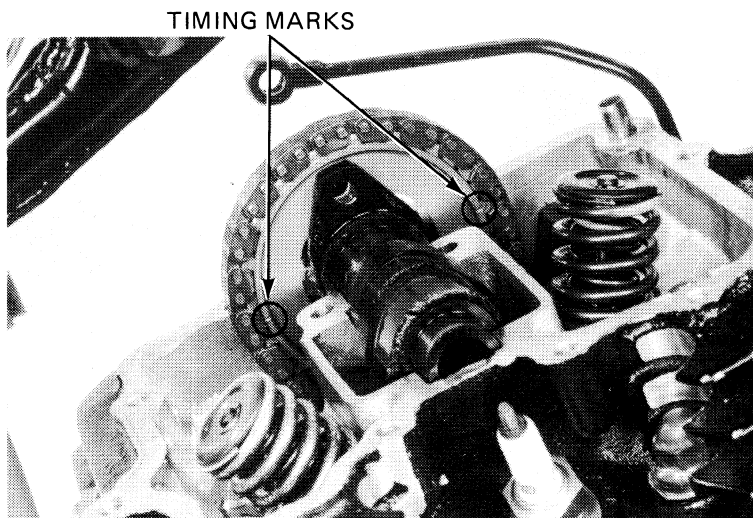

Fill into the oil pocket in the cylinder head with fresh oil.

