


HANDLEBAR

REMOVAL

Remove the wire bands.
 Remove the front and rear brake lever brackets.
 Remove the throttle lever housing.
 Remove the switch housing.

Remove the handlebar upper holder covers.

Remove the handlebar upper holders and the handlebar.

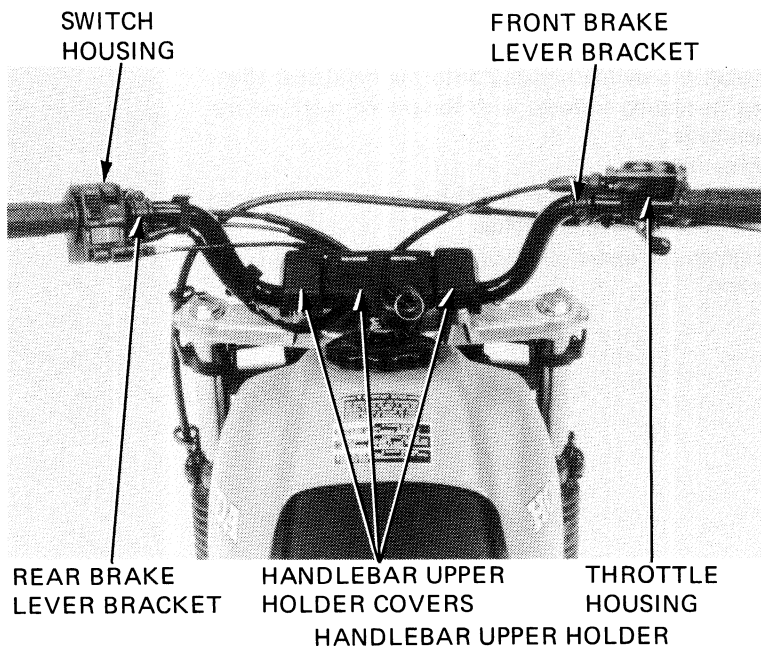


INSTALLATION

Place the handlebar on the handlebar lower holder.

Align the punch mark on the handlebar with the top of the handlebar lower holder.

Install the handlebar upper holders on the handlebar with the punch mark on the holder forward.
 Tighten the forward bolts first, then tighten the rear bolts.

TORQUE: 18–30 N·m (1.8–3.0 kg·m, 13–22 ft·lb)

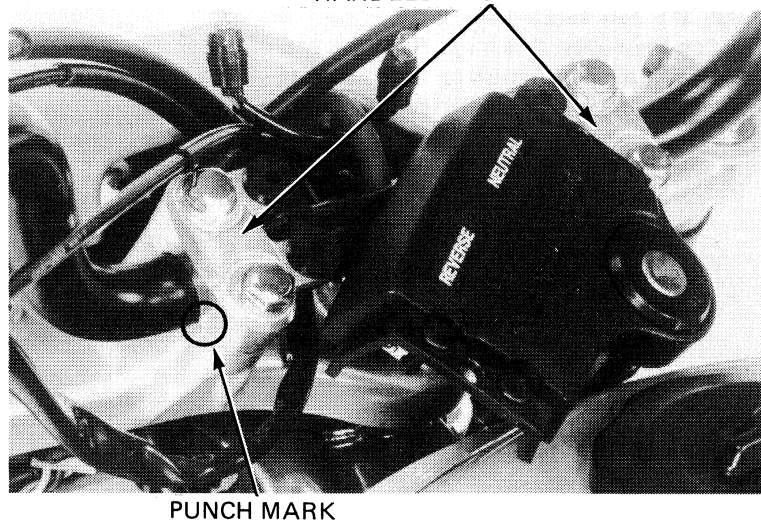

Install the handlebar upper holder covers.

