


3. Remove the muffler mount bolt A, B and nut.
4. Remove the muffler.



5. Remove the rear wheel nuts, and remove the rear wheel.

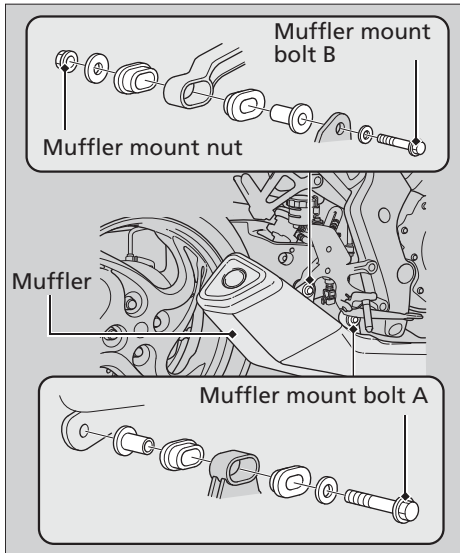