


Front Seat

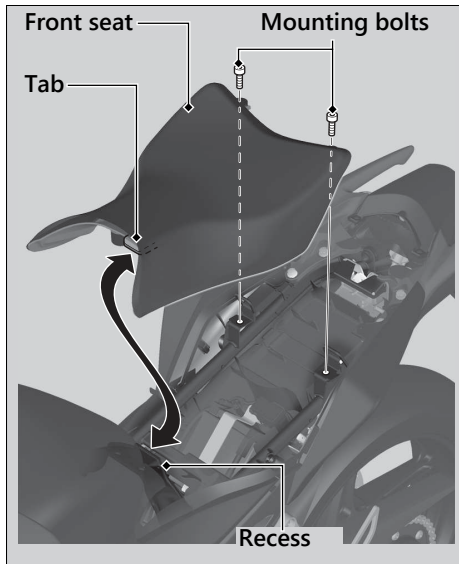

Removal

1. Remove the rear seat. ► P. 56
2. Remove the mounting bolts, and then pull the front seat back and up.

Installation

1. Insert the tab into the recess.
2. Install and tighten the mounting bolts securely.
Make sure that the seat is locked securely in position by pulling it up lightly.
3. Install the rear seat.