


## Seat

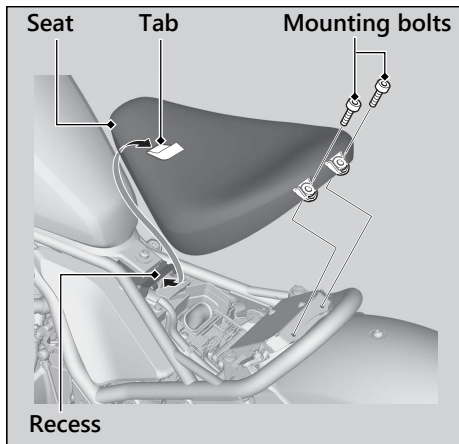

### Removal

1. Pull the rear corners of the seat up, then remove the mounting bolts using the 5 mm Hex wrench provided in the tool kit.  
► P. 39
2. Pull the seat back and up.

### Installation

1. Insert the tab into the recess.
  2. Install and tighten the mounting bolts securely.
- Make sure that the seat is locked securely in position by pulling it up lightly.