


For your protection, always wear your helmet while riding. Read the owner's manual carefully.

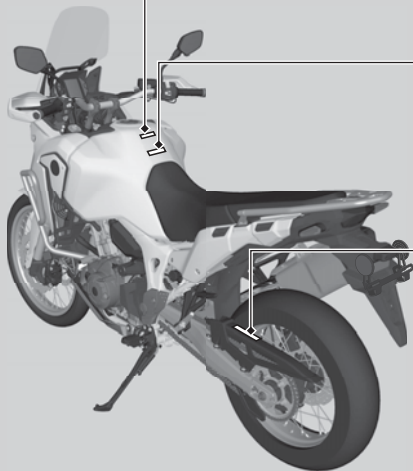

**⚠ WARNING**

Improper loading can cause a crash and you may be seriously hurt or killed. See "Load Limits and Guidelines" in your Owner's Manual for complete instructions.

**CRF1000A/D**

TIRE INFORMATION			
Cold tire pressures		kPa	kgf/cm <sup>2</sup> psi
Up to maximum weight capacity	Front	225	2,25 33
	Rear	280	2,80 41
Up to 90kg(200lbs) load	Front	200	2,00 29
	Rear	250	2,50 36
Tire size	Front	90/90-21M/C 54H	
	Rear	150/70R18M/C 70H	
Min, recommend	Front	1,5mm (0,06in.)	
tire center tread depth,	Rear	2,0mm (0,08in.)	
Maximum weight capacity		198kg(437lbs)	

**DRIVE CHAIN**

Keep chain adjusted and lubricated, 40 mm (1 5/8 in.) Freeplay

Read owner's manual.

**CRF1000A II/D II**

TIRE INFORMATION			
Cold tire pressures		kPa	kgf/cm <sup>2</sup> psi
Up to maximum weight capacity	Front	225	2,25 33
	Rear	280	2,80 41
Up to 90kg(200lbs) load	Front	225	2,25 33
	Rear	280	2,80 41
Tire size	Front	90/90-21M/C 54H	
	Rear	150/70R18M/C 70H	
Min, recommend	Front	1,5mm (0,06in.)	
tire center tread depth,	Rear	2,0mm (0,08in.)	
Maximum weight capacity		180kg(397lbs)	

**DRIVE CHAIN**

Keep chain adjusted and lubricated, 50 mm (2 in.) Freeplay

Read owner's manual.