


# Drive Chain

---

## Lubrication

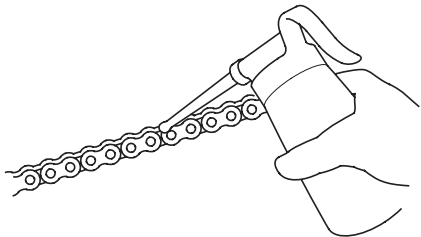

Lubricate every 300 miles (500 km) or sooner if chain appears dry.

The O-rings in this chain can be damaged by steam cleaning, high pressure washers, and certain solvents.

Lubricate: Pro Honda HP Chain Lube or an equivalent chain lubricant designed specifically for use on O-ring chains.

Commercial chain lubricants not designed for motorcycle drive chains may contain solvents which could damage the O-rings.