


Valve Clearance


Shim Selection

1. Clean the valve shim contact area in the valve lifter (1) with compressed air.

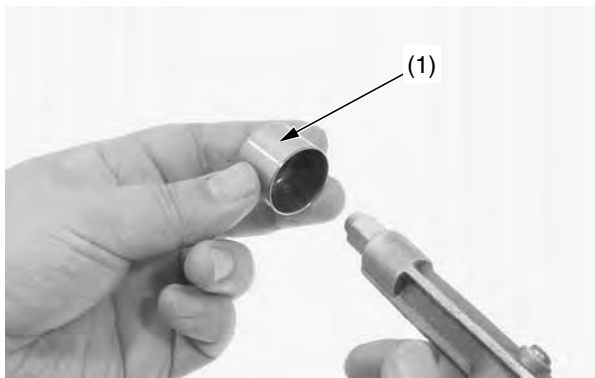

(1) valve lifter

2. Measure the shim thickness with a micrometer and record it.
Sixty-nine different thickness shims (2) are available from the thinnest (1.200 mm thickness) shim to the thickest (2.900 mm thickness) in intervals of 0.025 mm.

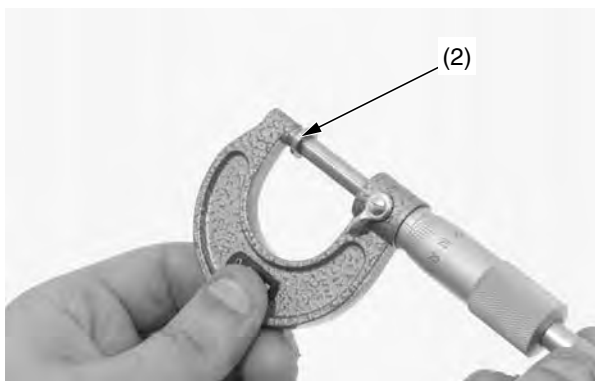

(2) shim

3. Calculate the new shim thickness using the equation below.

$$A = (B - C) + D$$

- A: New shim thickness
B: Recorded valve clearance
C: Specified valve clearance
D: Old shim thickness

- Make sure of the correct shim thickness by measuring the shim with a micrometer.
- Reface the exhaust valve seat if carbon deposits result in a calculated dimension of over 2.900 mm.

NOTICE

Do not lap the intake valves. They are titanium and have a thin oxide coating. Lapping will damage this coating.

If a calculated dimension is out of specifications, have your motorcycle inspected by your dealer.

