


Valve Clearance


Shim Selection

1. Clean the shim contact area in the valve lifter (1) with compressed air.

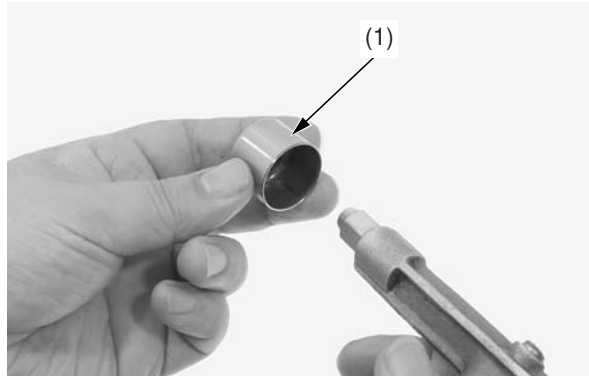

(1) valve lifter

2. Measure the shim thickness and record it. Seventy-three different thickness shims (2) are available from the thinnest (1.200 mm thickness) shim to the thickest (3.000 mm thickness) in intervals of 0.025 mm.

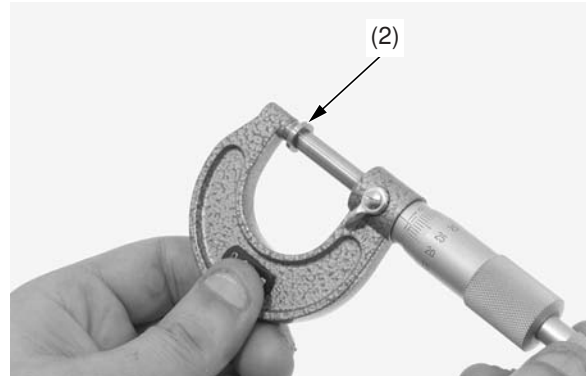

(2) shim

3. Calculate the new shim thickness using the equation below.

$$A = (B - C) + D$$

A: New shim thickness
 B: Recorded valve clearance
 C: Specified valve clearance
 D: Old shim thickness

- Make sure of the correct shim thickness by measuring the shim with the micrometer.
- Reface the intake valve seat if carbon deposits result in a calculated dimension of over 2.450 mm.
 Reface the exhaust valve seat if carbon deposits result in a calculated dimension of over 3.000 mm.

180	182	185	188
1.80 mm	1.825 mm	1.85 mm	1.875 mm