


CARGO LIMIT

2.0kg / 4.5lbs

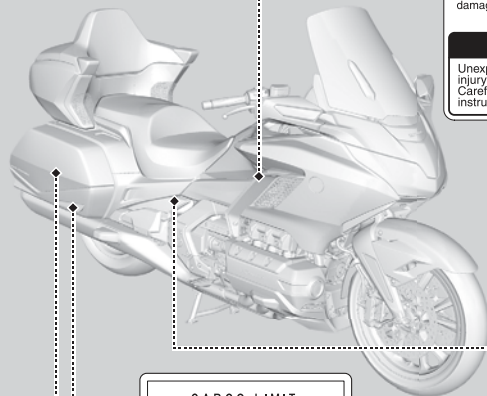

CARGO LIMIT

9.0kg / 20.0lbs

GL1800DA

[EQUIPPED WITH AIRBAGS]

All airbag system wires/connectors are yellow. Disconnecting, tampering with, or using test equipment on any yellow wires or connectors can cause system damage or accidental deployment.

▲ WARNING

Unexpected deployment could cause serious injury to you or others. Carefully follow the Service Manual instructions.


GL1800/D

Cargo Limit

3.0kg / 6.6lbs

CARGO LIMIT

9.0kg / 20.0lbs

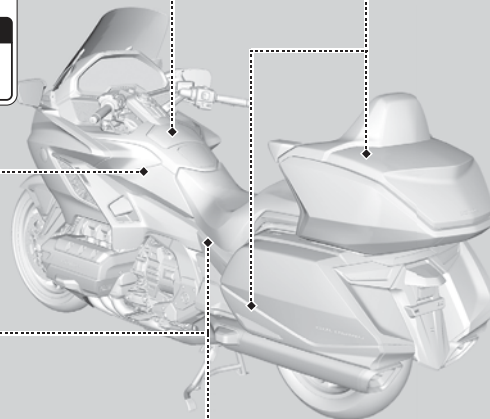

GL1800/D

TIRE INFORMATION

Cold tire pressures		kPa	kgf/cm ²	psi
Up to maximum weight capacity	Front	250	2.50	36
	Rear	260	2.60	41
Up to 90kg(200lbs) load	Front	250	2.50	36
	Rear	260	2.60	41
Tire size	Front	180/55R16M/C 65H		
	Rear	200/55R16M/C 77H		
Min. recommend	Front	1.5mm(0.06in.)		
tire center tread depth,	Rear	2.0mm(0.08in.)		
Maximum weight capacity		192kg(423lbs)		

Read owner's manual.

GL1800DA

TIRE INFORMATION

Cold tire pressures		kPa	kgf/cm ²	psi
Up to maximum weight capacity	Front	250	2.50	36
	Rear	260	2.60	41
Up to 90kg(200lbs) load	Front	250	2.50	36
	Rear	260	2.60	41
Tire size	Front	180/55R16M/C 65H		
	Rear	200/55R16M/C 77H		
Min. recommend	Front	1.5mm(0.06in.)		
tire center tread depth,	Rear	2.0mm(0.08in.)		
Maximum weight capacity		189kg(417lbs)		

Read owner's manual.

GL1800DA

▲ WARNING

Airbag system wires and connectors are yellow. Tampering with, cutting, splicing, or disconnecting yellow wires/connectors could cause airbag deployment or a system failure resulting in serious injury or death.