


- (1) BOOT
- (2) SNAP RING
- (3) PISTON ASSEMBLY
- (4) SPRING
- (5) OIL SEAL
- (6) CIRCLIP

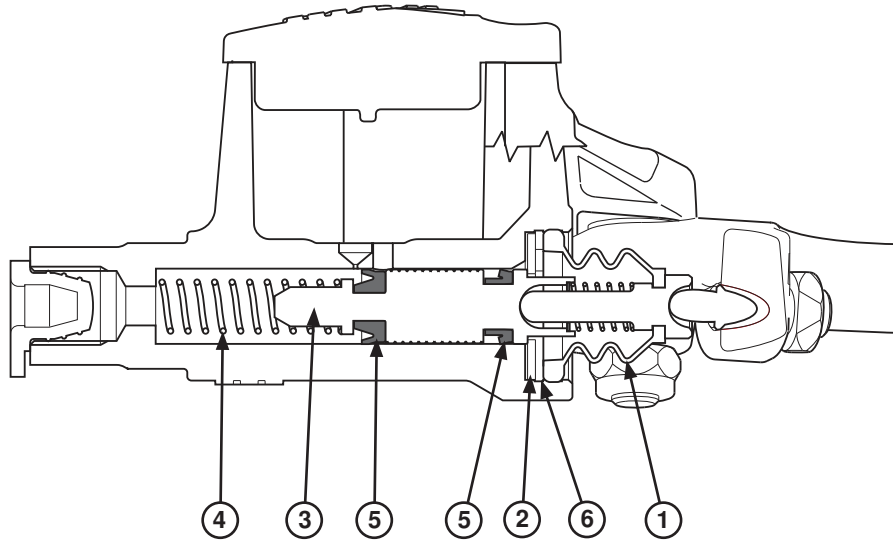

Disassembly/ Assembly

NOTICE

- *Keep the master cylinder piston, cups, spring and snap ring as a set; don't substitute individual parts.*
- *When installing the cups, do not allow the lips to turn inside out and be certain the snap ring is firmly seating in the groove.*

Remove the snap ring and disassemble the master cylinder.

Inspection

- Check the following items:
- Master cylinder and piston for scoring, scratches or other damage
 - Master piston O.D. and master cylinder I.D.

Installation

Installation is in the reverse order of removal.

Torque:

- Brake hose oil bolt:** 14 N·m (1.4 kgf·m, 10.3 lbf·ft)
- Master cylinder holder bolt:** 5.5 N·m (0.56 kgf·m, 4.1 lbf·ft)

Bleed the air in the front brake system.