

# Safety Labels


## ROPS Information

Honda of South Carolina Manufacturing, Inc.  
1111 Honda Way  
Timmonsville, SC

Model: Honda SXS 500M Pioneer  
Test GVWR: **1,933 lbs (877 kg)**

ROPS meets requirements of OSHA Part 1928.53

OSHA

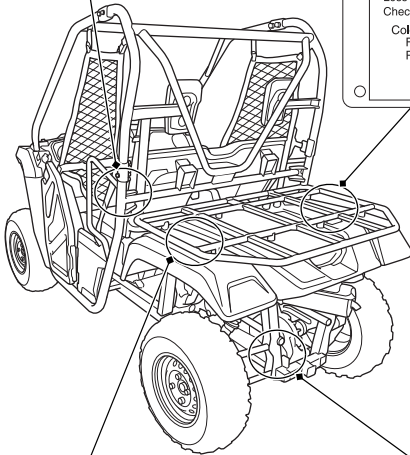

## ⚠ WARNING

Improper tire pressure, overloading, or overly worn or damaged tires can cause loss of control. Loss of control can result in severe injury or death. Check tires before each use.

Cold tire pressure:  
Front : 10psi (70kPa)  
Rear : 10psi (70kPa)

Maximum weight capacity :  
**880 lbs. (399 kg)**  
(Including weight of cargo, occupants, accessories and trailer tongue load)

tire & overload warning

## ⚠ WARNING

SERIOUS INJURY or DEATH can result if you ignore the following:  
**DO NOT RIDE ON CARGO RACK.**

**DO NOT OVERLOAD CARGO RACK.**

- Overloading can cause loss of control and crash.
- Maximum load (**450 lbs/203 kg**).
- Keep cargo on rack, as far forward, centered and as low as possible.
- Secure items to prevent shifting.
- Reduce speed and allow more room to turn or stop.

loading warning

## ⚠ WARNING

Improper towing can result in serious injury or death.

- Don't exceed the towing capacity.
- When towing, reduce speed, allow more room to turn and stop.
- Read the towing section in the owner's manual.

### Towing Capacity

- Towing weight limit **1000 lbs. (454 kg)**
- Tongue weight limit **100 lbs. (45 kg)**

trailer hitch