
## **Side Nets**

## **Side Nets Set Up**

The left and right side nets can be set up in the same manner.

Inspect the side nets and their mounting hardware for damage as specified in the maintenance schedule on page 95.

- 1. Hook the side net snap hooks.
- 2. Tighten the belt on the lower side net D-ring and door side net D-ring.

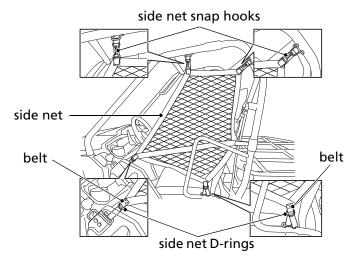

## Side net snap hooks wear limit

Inspect the side net snap hooks for wear. If the side net snap hook become less than 0.24 in (6 mm), see your SXS dealer for replacement.

