
The battery is located in a compartment under the rear fender cover.

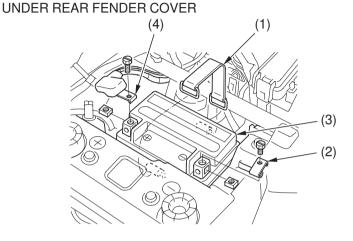

(1) rubber band(3) battery(2) negative (-) terminal lead(4) positive (+) terminal lead

## Removal

- 1. Make sure the ignition switch is OFF (  $\bigcirc$  ).
- 2. Remove the seat (page100).
- 3. Remove the rear fender cover (page 121).
- 4. Release the rings and remove the rubber band (1).
- 5. Disconnect the negative (-) terminal lead (2) from the battery (3) first, then disconnect the positive (+) terminal lead (4).

(cont'd)