


Seat

USA model (Model not equipped with Optional Passenger Seat Kit)

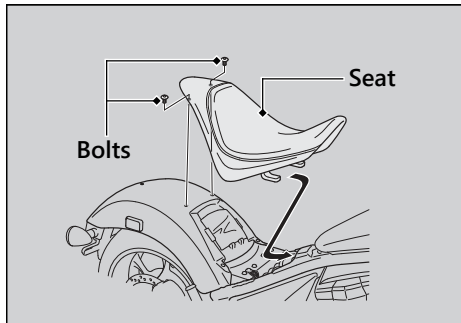

Removal

1. Remove the bolts.
2. Pull the seat back and up.

Installation

1. Insert the tabs into the recess under the frame.
2. Install and tighten the bolts.
 - Be careful not to scratch the rear fender during seat installation or removal.