


LEFT HANDLEBAR REMOVAL/INSTALLATION

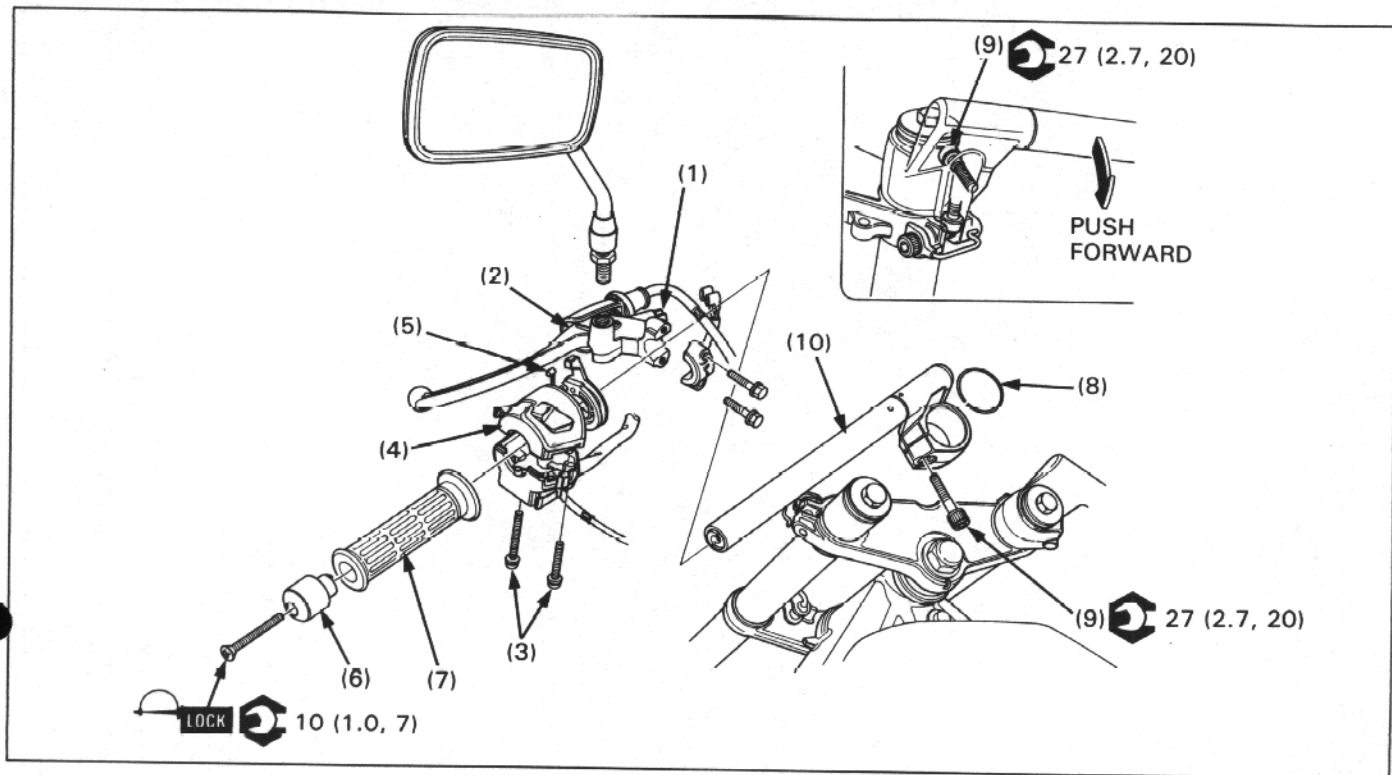

NOTE

- Route the cables and wire harnesses properly (page 1-19).
- Adjust the clutch cable after installation.

PROCEDURE		Q'ty	INSTALLATION REMARKS
REMOVAL ORDER			• Installation is in the reverse order of removal.
(1)	Clutch switch connector	2	Align the holder end with the punch mark on the handlebar and face the holder UP mark upward. Tighten the upper bolt first, then the lower bolt. Tighten the front screw first, then the rear screw.
(2)	Clutch lever assembly	1	
(3)	Left handlebar switch housing screw	2	
(4)	Left handlebar switch housing	1	Align its boss with the inner weight. Apply Honda Bond A or Honda Hand Grip Cement (U.S.A. only) to the inside surface of the grip. Install into the fork groove properly. Tighten with the handlebar pushing forward. Align the handlebar boss with the top bridge slot.
(5)	Choke cable	1	
(6)	Handlebar weight	1	
(7)	Handle grip	1	
(8)	Stop ring	1	
(9)	Handlebar pinch bolt	1	
(10)	Left handlebar	1	