


Drive Sprocket Cover Removal/Installation

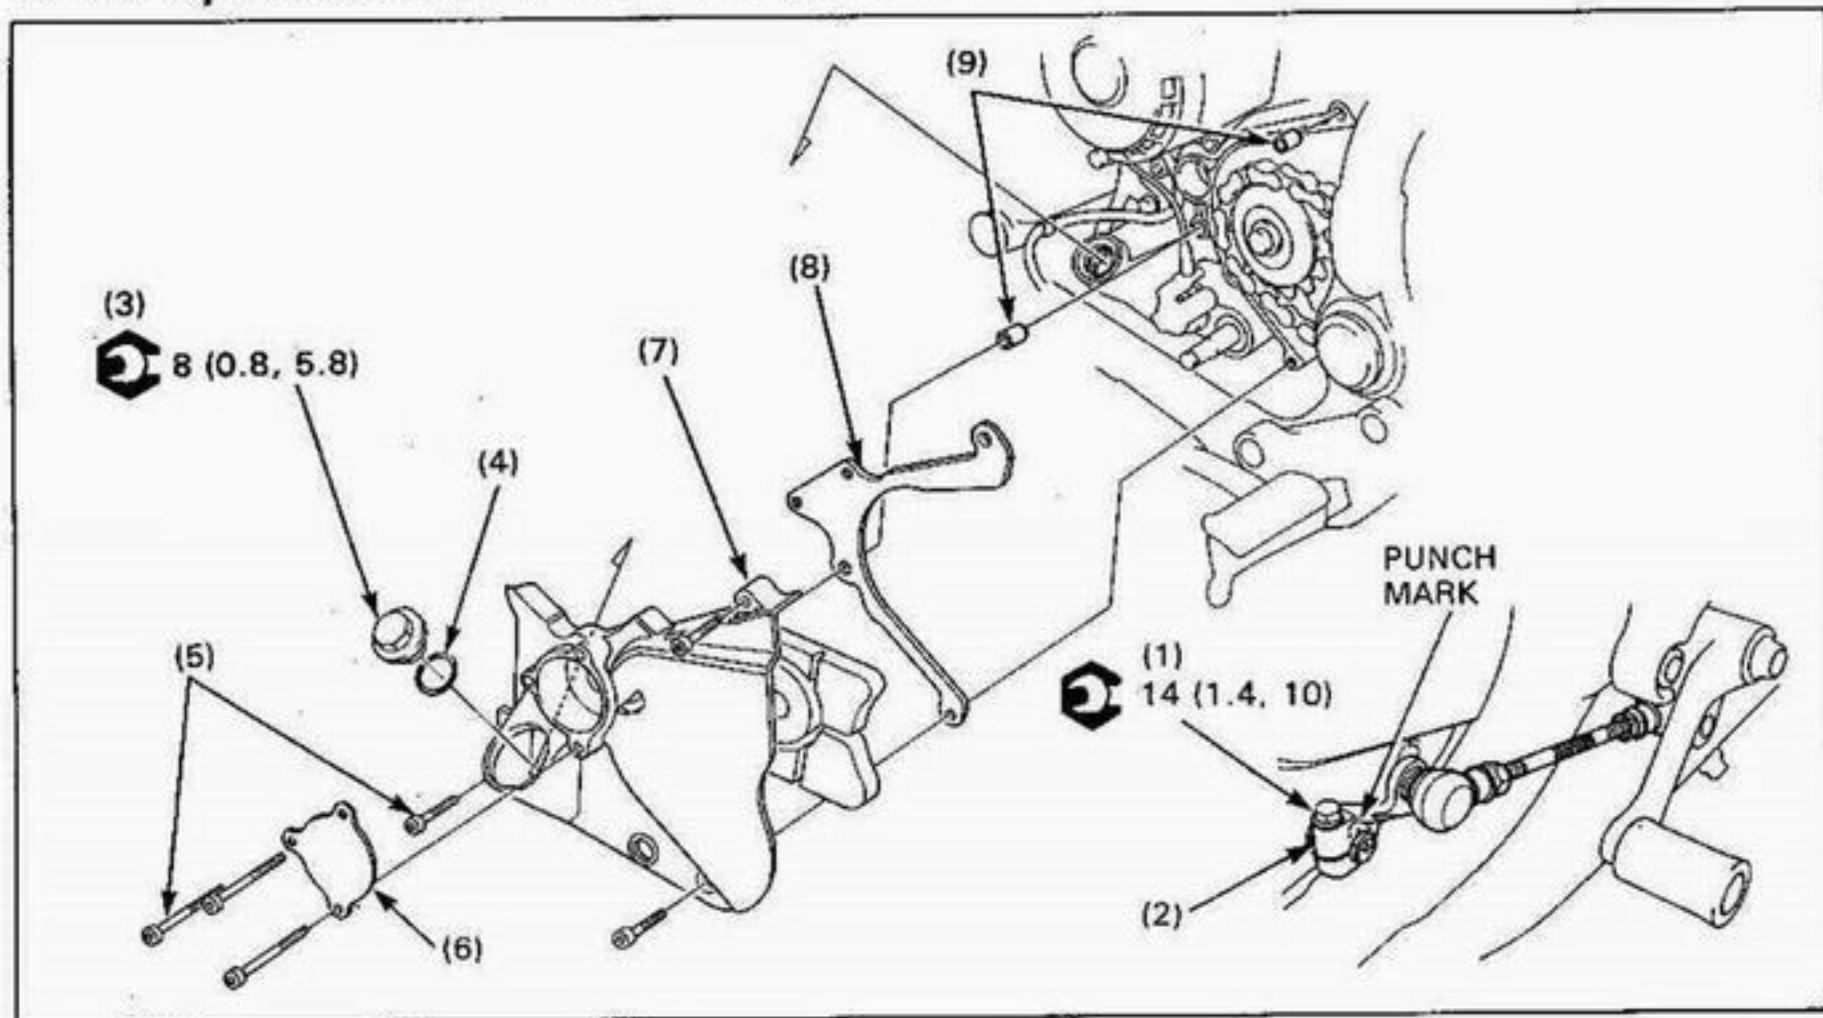

CAUTION

- Be careful not to damage the wire harnesses by pinching them between the sprocket cover and engine.

NOTE

- The change cover cap must be removed for the drive sprocket cover removal.
- Route the wire harnesses properly (page 1-21).

Requisite Service

- Engine oil draining/refill
- Place the motorcycle on its center stand

Procedure	Qty	Remarks
Removal Order		Installation is in the reverse order of removal.
(1) Gearshift spindle joint bolt	1	At installation, align the punch marks on the joint and spindle.
(2) Gearshift spindle joint	1	
(3) Change cover cap	1	
(4) O-ring	1	
(5) Drive sprocket cover bolt	6	
(6) Drive sprocket cover plate	1	
(7) Drive sprocket cover	1	
(8) Drive chain guide	1	
(9) Dowel pin	2	