


## FRAME/BODY PANELS/EXHAUST SYSTEM


Loosen the muffler clamp bolt.



Loosen the carburetor connecting tube band screw.

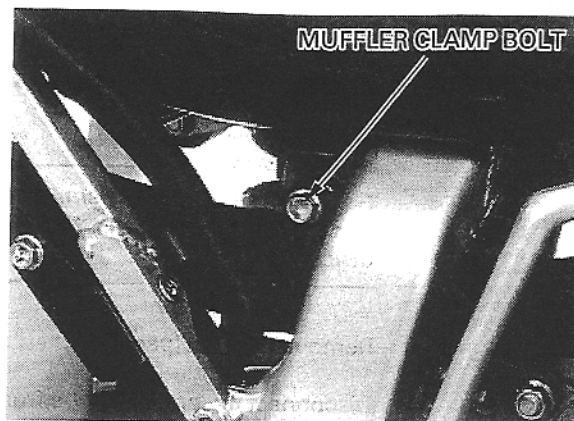

Remove the left lower sub-frame mounting bolt and upper chain slider.

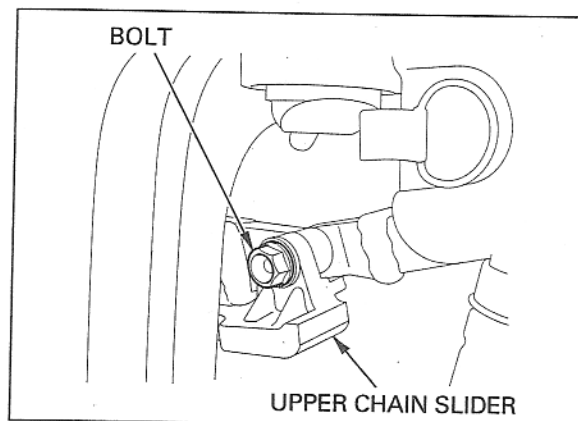

Remove the upper and lower sub-frame mounting bolts, and then remove the sub-frame.

