

CARBURETOR


NOTE:

- * Do not attempt to compensate for faults in other systems by carburetor adjustment. See your authorized Honda dealer for regularly scheduled carburetor adjustments.
- * The engine must be warm for accurate idle adjustment. Ten minutes of stop-and-go riding is sufficient.

1. Warm up the engine.
2. Adjust idle speed with the throttle stop screw.
IDLE SPEED: $1,700 \pm 100$ rpm
3. Turn the pilot screw (2) clockwise until you hear the engine miss or decrease in speed, then counterclockwise until the engine again misses or decreases in speed. Center the air screw exactly between these two extreme positions.

Usually the correct setting (between extremes of rich and lean) will be found to be $1\frac{1}{8}$ turns open from a fully closed position.

If idle speed changes after adjusting fuel mixture, readjust the throttle stop screw.

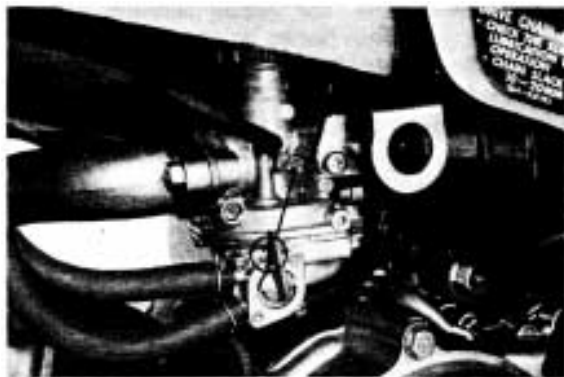

(1) Throttle stop screw