

SPARK PLUGS

(Refer to the maintenance precautions on page 61).

Recommended plugs:


Standard:

DPR9EA-9 (NGK) or
X27EPR-U9 (NIPPONDENSO)
(Except F)
DPR8EA-9 (NGK) or
X24EPR-U9 (NIPPONDENSO)
(F only)

For extended high speed riding:

DPR9EA-9 (NGK) or
X27EPR-U9 (NIPPONDENSO)
(F only)

1. Remove the seat (see page 38).
2. Remove the fuel tank front mount bolts (1) and washer (2).

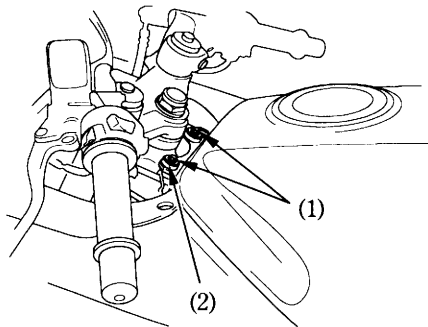

- (1) Mount bolts
(2) Washer